




We are committed to providing industry cutting-edge products and technology



Sales Hotline:400-110-1833

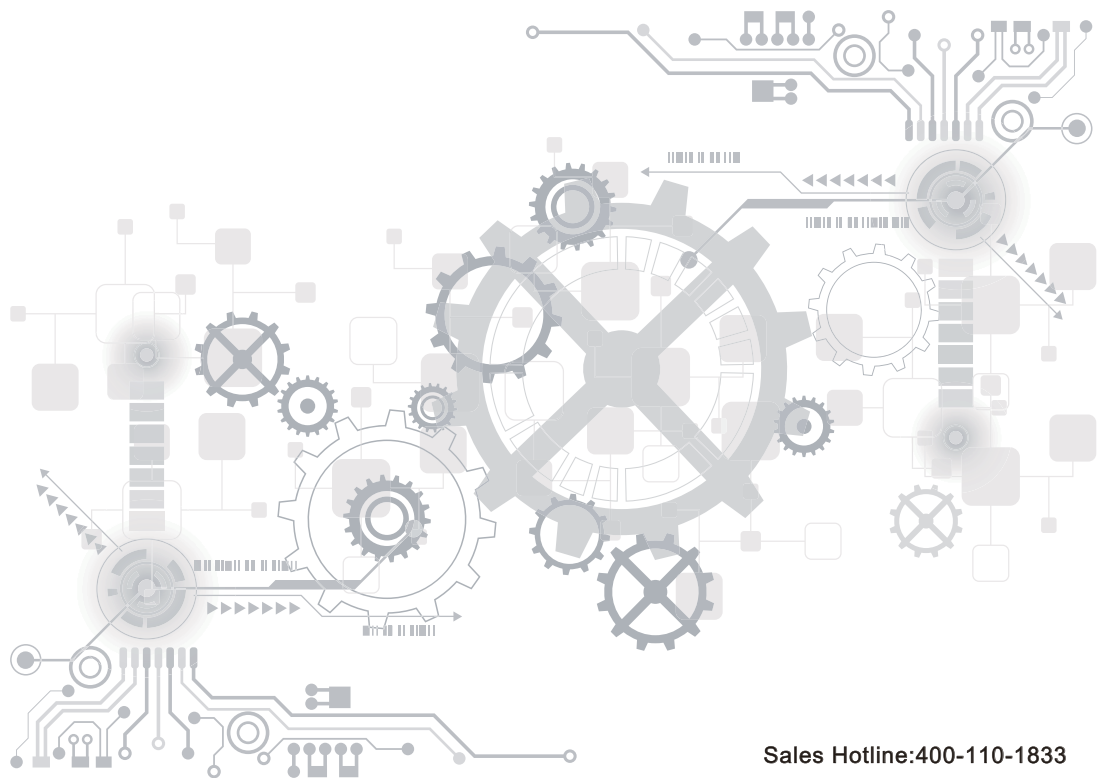

Novocrane (Suzhou) Co., Ltd.

Add:No. 1288 Pangjin Road, Wujiang Economic Development Zone, Suzhou (215200)

TEL: + 86-512-6312 0889 Fax: + 86-512-6312 0886

E-mail: sales@novocrane.com Website: www.novocrane.com

NC-CH-EN-01

Novocrane retain the right of changing the product's design and specifications any time; when procurement and delivery, please refer to the actual product.



HOIST MASTER

NCH Series Electric Chain Hoists



INNOVATION CREATES VALUE

www.novocrane.com



HOIST MASTER

Focus on the development of electric hoist professional field and market segmentation development

Mission: Innovation creates value

Vision: The world's leading electric hoist manufacturer

Core values: Quality, Innovation and Cooperation



Stable, reliable, accurate and intelligent
Novocrane basic requirements for each product

Through constant improving in efficiency, quality and safety,
Novocrane all-round class technology brings you more benefits



Novocrane, known as hoist expert! we are an enterprise which is innovative and pay attention to the accumulation. In the changing global market, quality has always been our persistent competitive advantage: Having implemented the total quality control from material to technology, from the production process to technical support, Novocrane has always been adhering to the spirit with craftsmen to build our products and services, improve customer experience, and create long-term value for our customers, employees, and partners.



Seamless connecting the customer needs. When communicating with the customers, we actively listen to customers' needs, to make our technology and products more targeted and more comprehensive, so as to improve equipments' efficiency, security and stability, and to ensure that the equipment can run efficiently in harsh construction environment, and to reduce operating costs and risks, to create greater value for the customers

Cutting-edge R&D strength and profound industry experience
anticipate and fulfill the customers' requirements



Thoughtful service for you



Achieve sustainable development



According to the needs of industrial customers and relying on strong research and development and innovation capabilities, Novocrane has constantly developed the special products with independent intellectual property rights, improved the company's intelligent manufacturing solutions, and provided customers with one-stop industrial services in terms of system upgrading, safety protection, energy saving and efficiency improvement.

In both work and life it is the discipline of all our actions



In the process of enterprise development, Novocrane has accumulated its own set of values. She is the thinking foundation and conduct code of Novocrane's people, and an important basis for the company to achieve its development vision. We know very well that every accomplishment cannot leave the company staff's professional skills, honesty, commitment and dedication. Moreover, we focus on technology development staff to launch the promotion system of the engineer rank, and have provided specialized talent management skills training for managerial talents, and allows every employee to give full play to their potential in the expertise field, and we are committed to building the career development platform with the openness, inclusiveness and diversity.



Values

Customer First / Teamwork / Full Dedication / Value Creation / Pursuit of Excellence



NCH Electric Chain Hoist

Lifting Capacity: 150Kg-7500Kg



Product Superiority:

- Brand new contracted design
- Full-sealed body
- New-design die-casting aluminum shell
- Light weight
- High efficiency transmission
- Maintenance free
- Easy operation, light and practical
- Long service time
- Safe and reliable



▲
M/E type
Monorail Electric Chain Hoist
Travelling Electric Chain Hoist



▲
F type
Fixed Electric Chain Hoist



▲
P type
Manual Trolley Electric Chain Hoist

Choose according to the need of light and medium duty application.

Tailor Made For Customer

Novocrane NCH Electric Chain Hoist is compact and reliable. The modular design enables a wide application in complex occasions and customization. Because modularization brings a flexible combination of different lifting capacities, different lifting speeds and working levels, and outstanding performance for quick transportation and precise assembly.

Excellent Performance

The main driving component in hoists of this series is designed to be maintenance free. The electro-magnetic disc brake can reduce the running noise effectively. The standard and humanized design not only improves the operation performance, but also reduces the maintenance cost greatly.

Manufactured In Accordance With International Standard

Novocrane NCH Electric Chain Hoist is compact, reliable, durable and suitable for a wide range of applications. The hoist of this series has adopted the Germany design concept. NCH Electric Chain Hoists are designed and manufactured fully in accordance with European FEM, EN and Germany DIN standards as well as the ISO and Chinese GB/JB standards.



Dimension



Dimension of NCH1/NCH2-F Types (Fixed)

Model	NCH1051	NCH1051-2	NCH1052	NCH2051	NCH2071	NCH2072
B, mm	348,5	348,5	348,5	381,5	381,5	381,5
B1, mm	166,5	166,5	166,5	185	185	185
B2, mm	195	195	195	195	195	195
B3, mm	20	20	20	24	24	25
H(Size 1), mm	512	512	503	547	547	557
H(Size 2), mm	662	662	653	697	697	707
R1, mm	19	19	23	20	20	27,5
L, mm	478,5	478,5	478,5	526	526	526
L1, mm	115	115	139	118,5	118,5	152
L2, mm	383	383	383	413	413	413
Ø1, mm	30	34	40	34	40	48
D, mm	24	27	32	27	32	38
C, mm	460	475	525,5	505	519	622
C1, mm	91	91	80,5	104	104	114
C2, mm	162	162	162	180,5	180,5	180,5
C3, mm	204	220,5	283	220,5	234,5	327,5

Dimension of NCH5-F Types (Fixed)



Model	NCH5091	NCH5092	NCH5111	NCH5112
B, mm	532	532	532	532
B1, mm	205,5	205,5	205,5	205,5
B2, mm	300	300	300	300
B3, mm	30	30	30	30
H, mm	733,5	733,5	733,5	733,5
Ø2, mm	60	60	60	60
L, mm	549	549	549	549
L1, mm	270	313	267	313
L2, mm	432	432	432	432
L3, mm	278	238	278	238
Ø1, mm	48	50	50	56
D, mm	38	40	40	45
C, mm	643	720	650	754
C1, mm	121	121	121	121
C2, mm	205	205	205	205
C3, mm	316	393	323	427
C4, mm	30	30	30	30

Dimension of NCH1/NCH2-M/E Types (Monorail / Travelling)

Model	NCH1051-1	NCH1051-2	NCH1052	NCH2051	NCH2071	NCH2072
B, mm	348,5	348,5	348,5	381,5	381,5	381,5
B1, mm	166,5	166,5	166,5	185	185	185
B2, mm	348,5	348,5	348,5	381,5	381,5	381,5
L, mm	360	360	360	360	360	460
I1, mm	20	20	20	20	20	27
I2, mm	295	295	295	295	295	305
I3, mm	348	348	348	348	348	402
h1, mm	115	115	115	115	115	130
h2, mm	97	97	97	97	97	102
h3, mm	20	20	20	20	20	24
E, mm	50-230	50-230	50-230	50-230	50-230	70-300
H(Size 1), mm	540	540	540	562	562	608
H(Size 2), mm	690	690	690	712	712	758
Ø1, mm	30	40	40	34	40	48
D, mm	24	32	32	27	32	38
L, mm	478,5	478,5	478,5	526	526	526
L1, mm	115	139	139	118,5	118,5	152
L2, mm	383	383	383	413	413	413
C, mm	485	562,5	562,5	521	535	677
C1, mm	117,5	117,5	117,5	120	120	169
C2, mm	162	162	162	180,5	180,5	180,5
C3, mm	204	283	283	220,5	234,5	327,5

Dimension of NCH5-M/E Type (Monorail / Travelling)

Model	NCH5091	NCH5092	NCH5111	NCH5112
B, mm	532	532	532	532
B1, mm	205,5	205,5	205,5	205,5
B2, mm	300	300	300	300
L, mm	500	500	500	500
I1, mm	27	27	27	27
I2, mm	420	420	420	420
I3, mm	526	526	526	526
h1, mm	119	119	119	119
h2, mm	130	130	130	130
h3, mm	36	36	36	36
E, mm	80-320	80-320	80-320	80-320
H, mm	811	811	811	811
Ø1, mm	48	50	50	56
D, mm	38	40	40	45
L, mm	549	549	549	549
L1, mm	270	313	267	313
L2, mm	431	431	431	431
C, mm	725	800	728	832
C1, mm	199	199	199	199
C2, mm	205	205	205	205
C3, mm	316	393	323	427

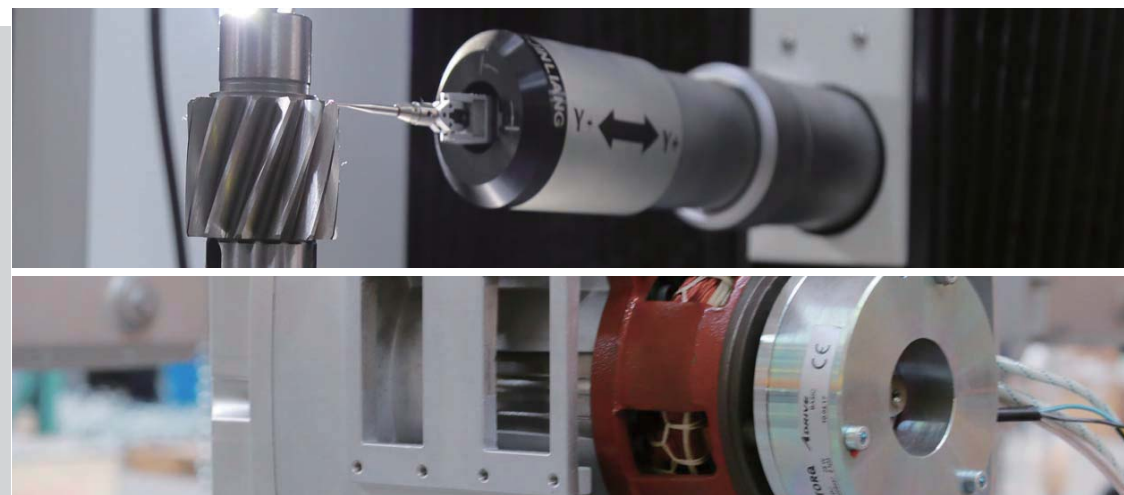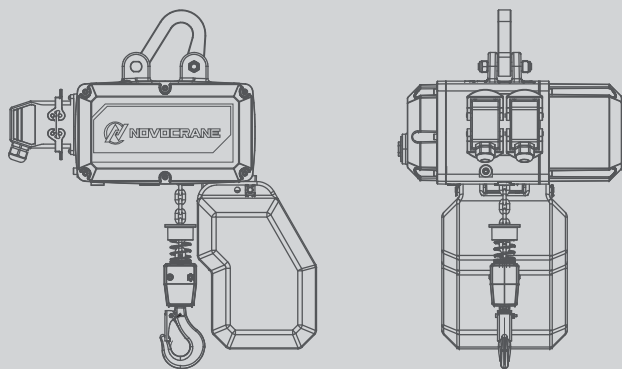

Selection Table of NCH Electric Chain Hoist


Load capacity (Kg)	FEM	ISO	Hoist type	Power (KW)	speed (m/min)	Number of falls
250	3m	M6	NCH105102508	0.75/0.18	8/2	1
250	2m	M5	NCH105102516	0.75/0.18	16/4	1
320	2m	M5	NCH105103208	0.75/0.18	8/2	1
320	1Am	M4	NCH105103216	0.75/0.18	16/4	1
500	1Am	M4	NCH105105008	0.75/0.18	8/2	1
500	3m	M6	NCH207105008	1.9/0.45	8/2	1
500	2m	M5	NCH205105016	1.9/0.45	16/4	1
630	2m	M5	NCH207106308	1.9/0.45	8/2	1
630	1Am	M4	NCH205106316	1.9/0.45	16/4	1
1000	1Am	M4	NCH105210004	0.75/0.18	4/1	2
1000	1Am	M4	NCH207110008	1.9/0.45	8/2	1
1000	2m	M5	NCH509110016	3.5/0.88	16/4	1
1600	2m	M5	NCH207216004	1.9/0.45	4/1	2
1600	2m	M5	NCH509116008	3.5/0.88	8/2	1
2000	1Am	M4	NCH207220004	1.9/0.45	4/1	2
2000	2m	M5	NCH511120006	3.5/0.88	6.3/1.6	1
2000	1Am	M4	NCH511120008	3.5/0.88	8/2	1
2500	2m	M5	NCH509225004	3.5/0.88	4/1	2
2500	1Am	M4	NCH511125006	3.5/0.88	6.3/1.6	1
3200	2m	M5	NCH511232003	3.5/0.88	3.2/0.75	2
3200	1Am	M4	NCH509232004	3.5/0.88	4/1	2
4000	1Am	M4	NCH511240004	3.5/0.88	3.2/0.75	2
4000	2m	M5	NCH511240003	3.5/0.88	4/1	2
5000	1Am	M4	NCH511250003	3.5/0.88	3.2/0.75	2
7500	1Am	M4	NCH511375002	3.5/0.88	2.1/0.5	3


Contact NOVOCRANE for more parameters and non-standard products.



Standard Configuration:

- > Two-speed lifting motor, silver gray body
- > Detachable upper lifting hug
- > Supply voltage: 380V/3P/50Hz
- > Control voltage: 48V
- > Limit switch
- > Black chain box
- > Hook and chain(lifting height :3 m)

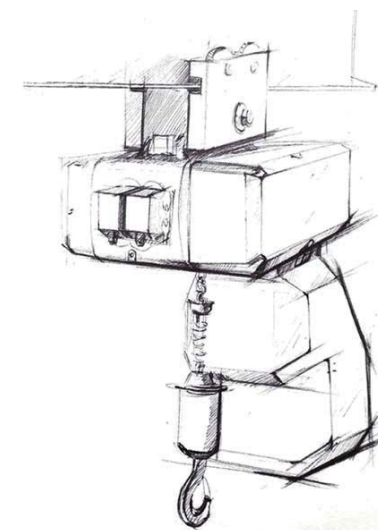

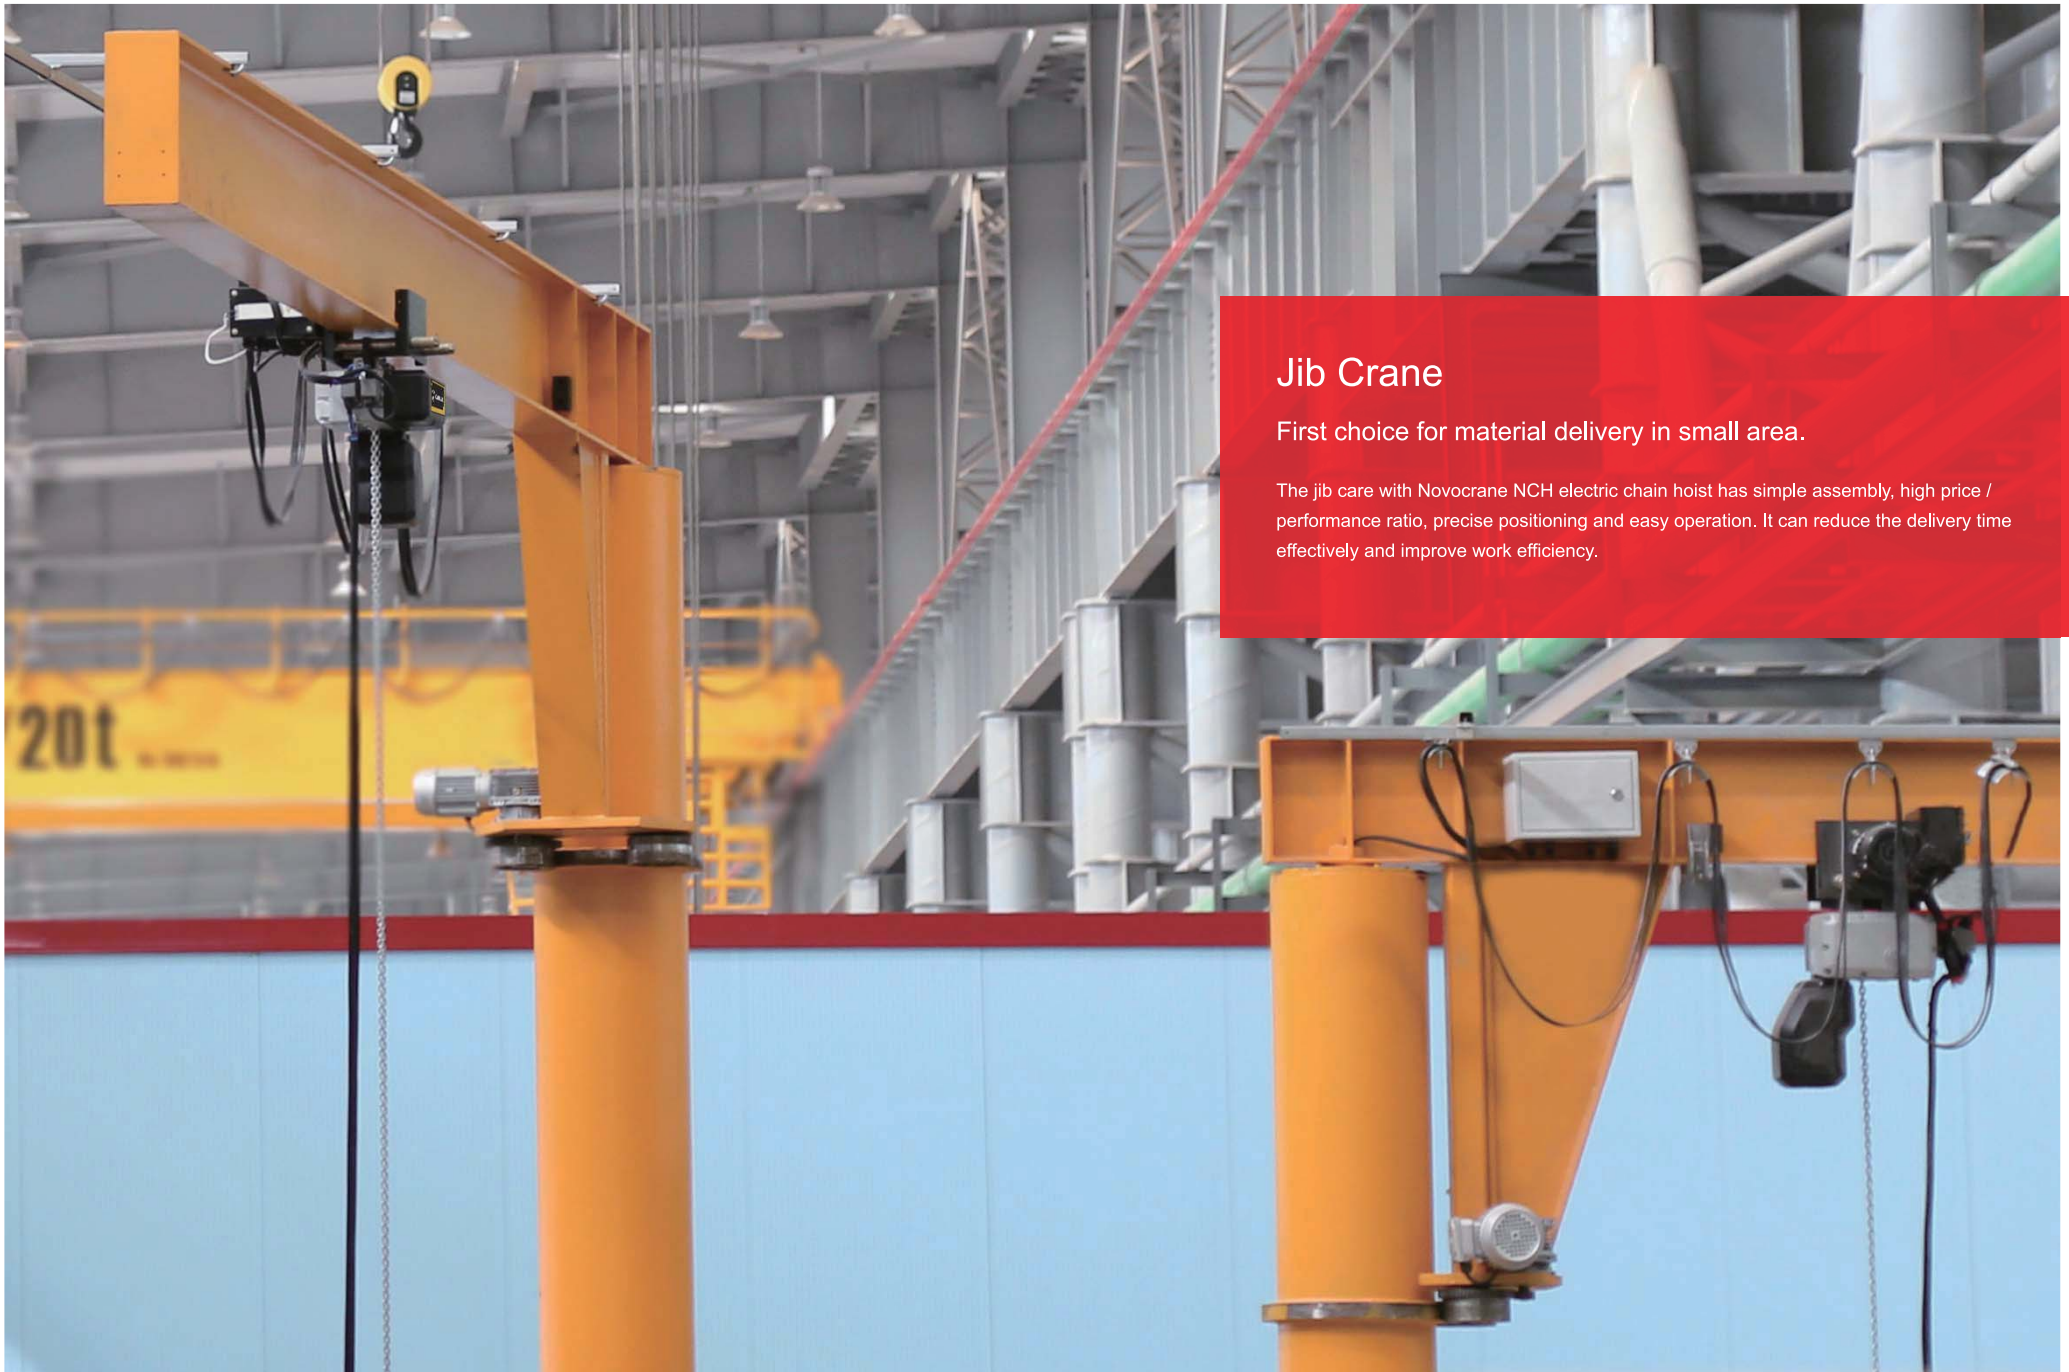

Jib Crane

First choice for material delivery in small area.


The jib crane with Novocrane NCH electric chain hoist has simple assembly, high price / performance ratio, precise positioning and easy operation. It can reduce the delivery time effectively and improve work efficiency.



Flexible-girder Crane

First choice for material delivery in medium-size spaces.

The flexible-girder crane with Novocrane NCH electric chain hoist has assembly, light weight and easy maintenance. It provides more configuration options in the layout of work station at late stage.

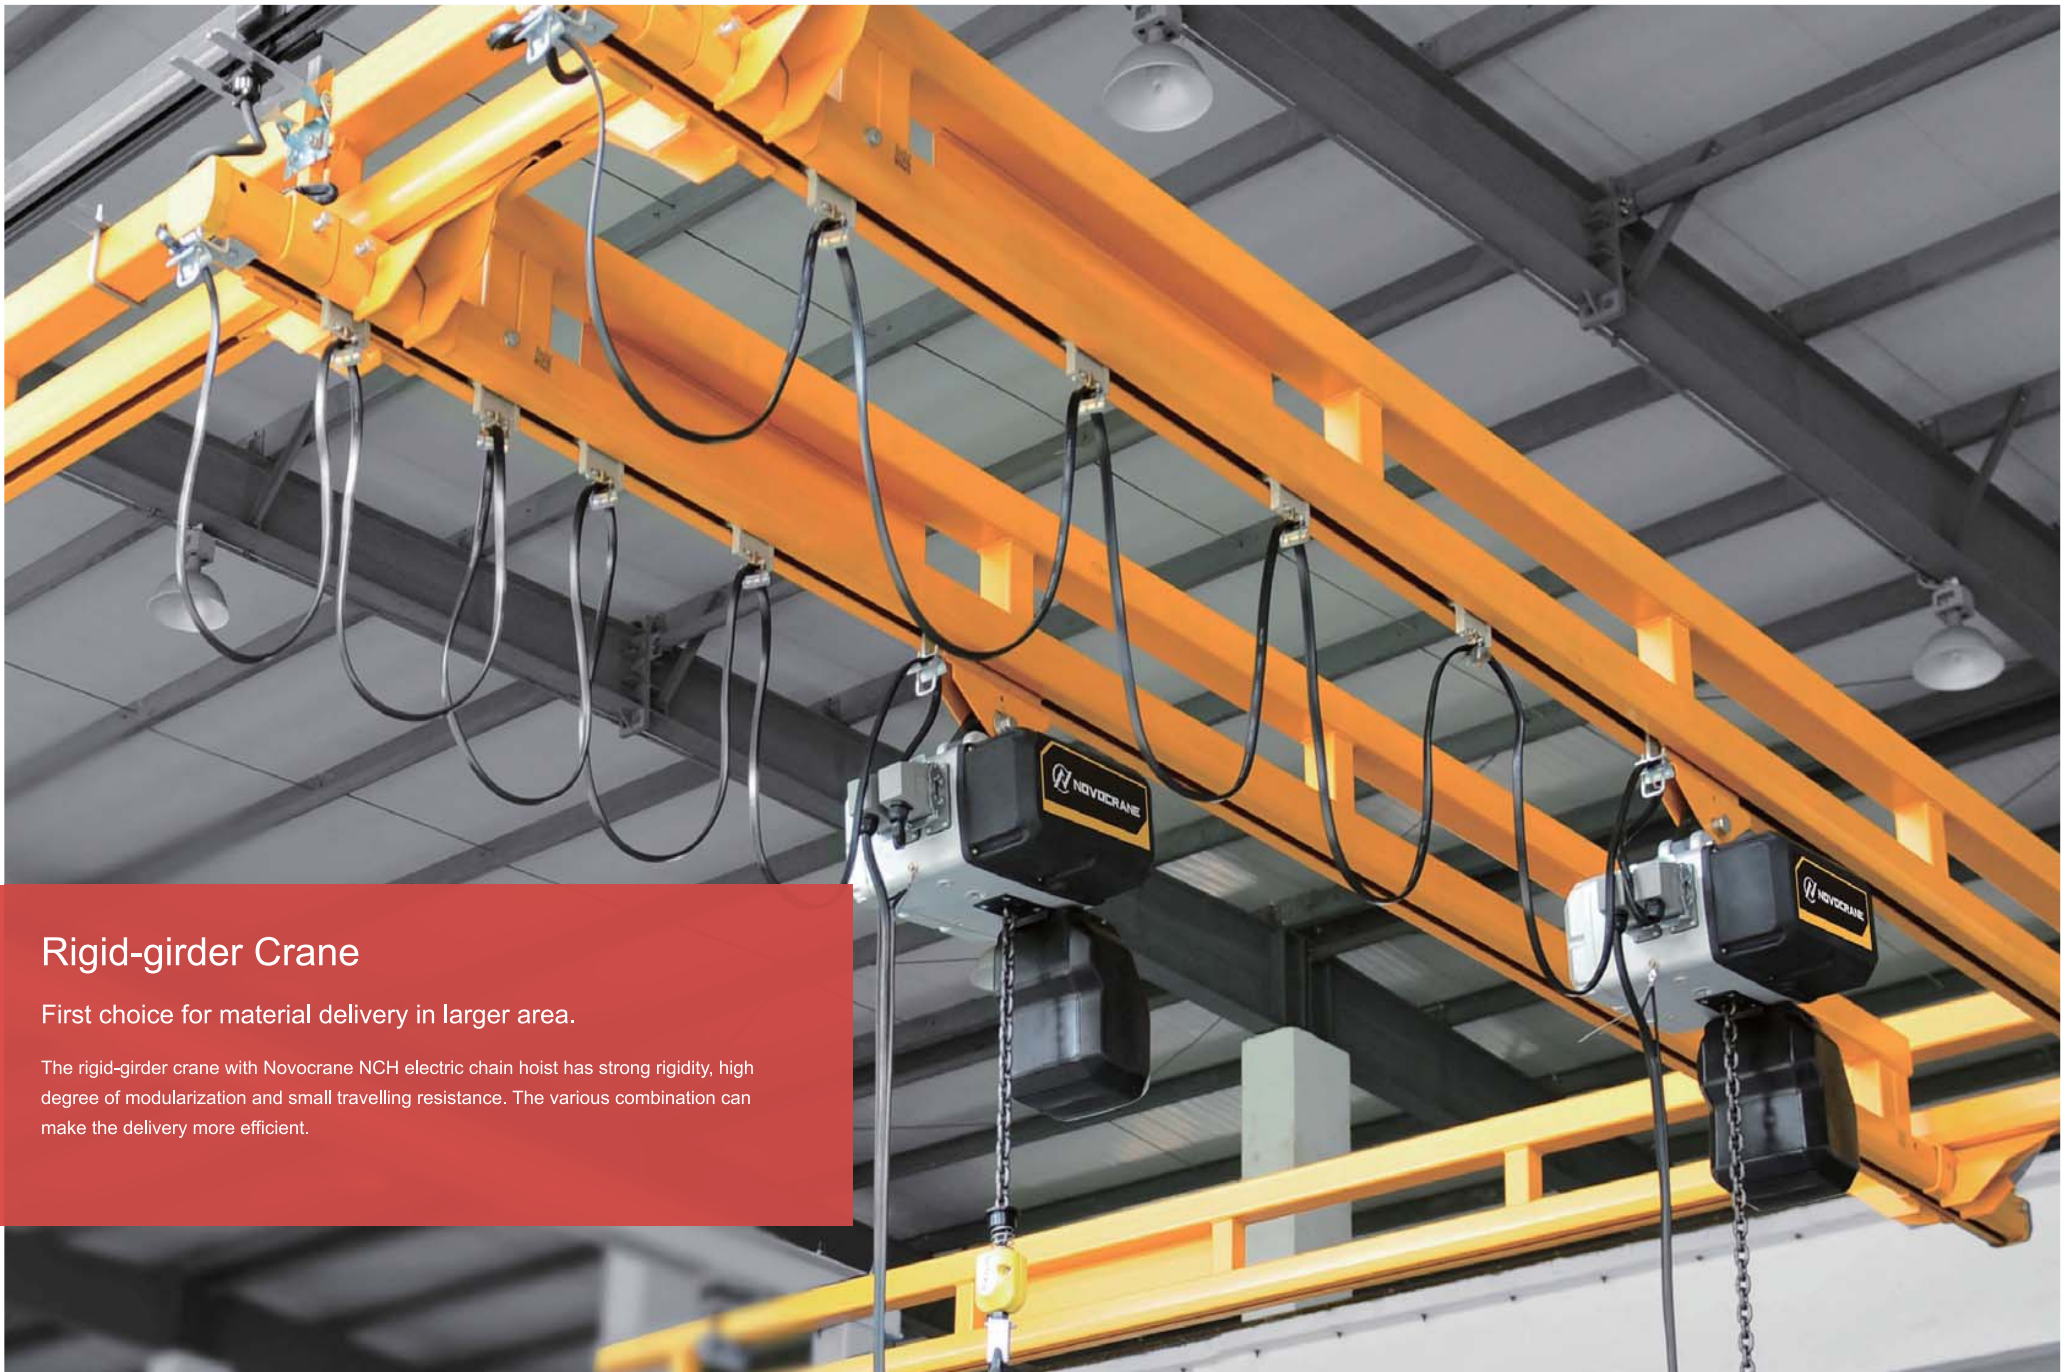

Rigid-girder Crane

First choice for material delivery in larger area.

The rigid-girder crane with Novocrane NCH electric chain hoist has strong rigidity, high degree of modularization and small travelling resistance. The various combination can make the delivery more efficient.



Overload Clutch

Integrated on the drive gear shaft
Overload protection function: keep torque safe.
Up to 1.4 times of safe load capacity
Maintenance-free design, adjustable overload torque



Reduction Gearbox


Helical-gear design, high transmission efficiency, low noise
Process with hardened gear, heat treatments after grinding,
accuracy grade of gear: 6
Full oil bath lubrication, ultra-low noise and ultra-long life
Perfect meshing and efficient transmission



Brake

Electromagnetic disc brake is arranged at the end of the
drive gear shaft
Asbestos free
Maintenance-free design, service life: 1 million brakes
Fully enclosed, high protection grade
Suitable for severe conditions

COMPONENT

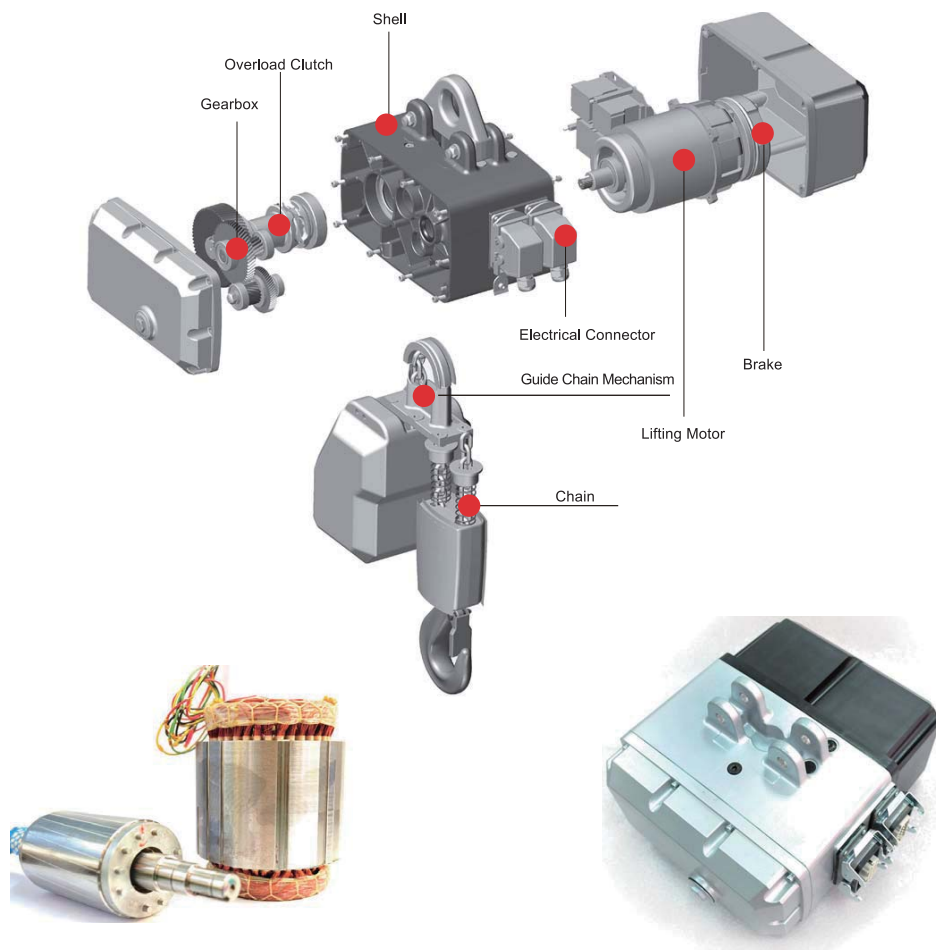

Lifting Motor

Light weight, small in size, rotation speed: up to 3000 rpm
High starting torque, high superior performance
Motor load: 60%, suitable for high-frequency lifting
Protection grade: IP55, insulation grade: Class F

Shell

High strength alloy die-casting and moulding in one
Good corrosion resistance and air-tightness
Special suspension design
Keeps the box body from the lifting load
Material of electric shell: engineering plastic
Light weight and good heat dissipation



Electrical Connector

Standard Aluminum connectors
Mis-connection proof and leakage proof
Ten core connector, easy control and power supply
Plug and play, convenient and efficient



Guide Chain Mechanism

Five-socket guide chain wheel
Hardening treatment on surface
Smoother and quieter
Suitable for aggressive working environment



Chain

Special high-strength alloy steel carburized chain
Zinc coating on surface
Wear resistance and corrosion resistance
High safety coefficient